



Technical data sheet

General data	
Frame size	63
Housing material	Aluminum
Install model	According to the standard
Type of feet	Fixed feet
Net weight	13.5 kg
Insulation class	F
Protection degree	IP 55
Thermal protection	Bimetallic sensor
Rotation direction	Clockwise
Service duty	S4-80% 30c/h
Vibration level	A
Balance	Half-key balanced
Cable glands	1 - M20 × 1.5
Cooling	IC 411
Painting color	RAL 5010
Regulations	IEC / DIN / ISO / VDE / EN
Standard	IEC 60034

Environmental conditions	
Ambient temperature	From -20°C to +40°C
Maximum altitude	1000 m above sea level

Electrical data		
Output	1.5	kW
Frequency	50	Hz
Voltage (±5%)	230	V Δ @ 50Hz
	400	V Y @ 50Hz
	276	V Δ @ 60Hz
	480	V Y @ 60Hz
Rotation speed	1360	RPM @ 50Hz
	1632	RPM @ 60Hz
Rated current	6.21	A (In) @ Δ 50Hz
	3.58	A (In) @ Y 50Hz
Starting current	6.2	×In
Rated torque	10.23	Nm (Mn)
Starting torque	2.7	×Mn
Breakdown torque	2.7	×Mn
Efficiency	80	@ 100% load
	81.5	@ 75% load
	81.8	@ 50% load
Power factor cosφ	0.79	@ 100% load

Mechanical data		
Bearings brand	C&U	
Bearings type	6205 2RZ C3	(DE)
	6204 2RZ C3	(NDE)
Allowed radial load		686 N
Allowed axial load		493 N
Moment of inertia	0.001563	Kg*m ²
Noise level	63	dB(A)

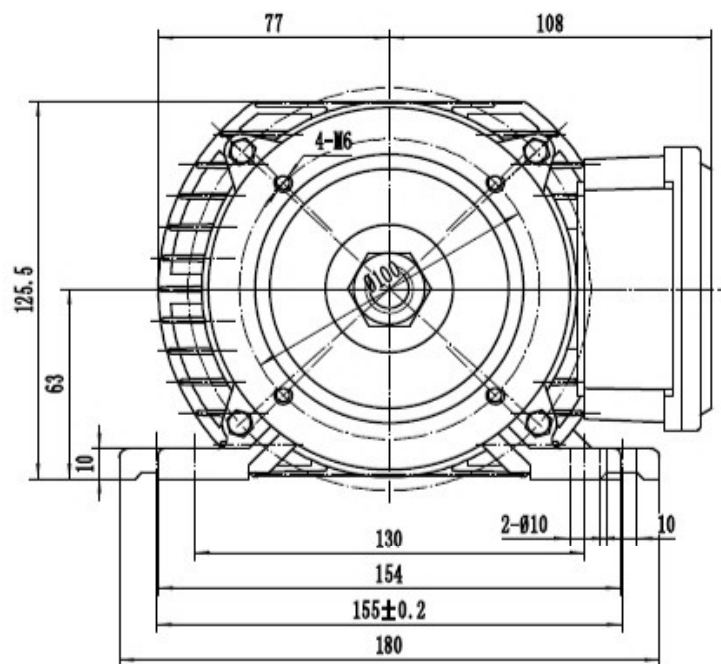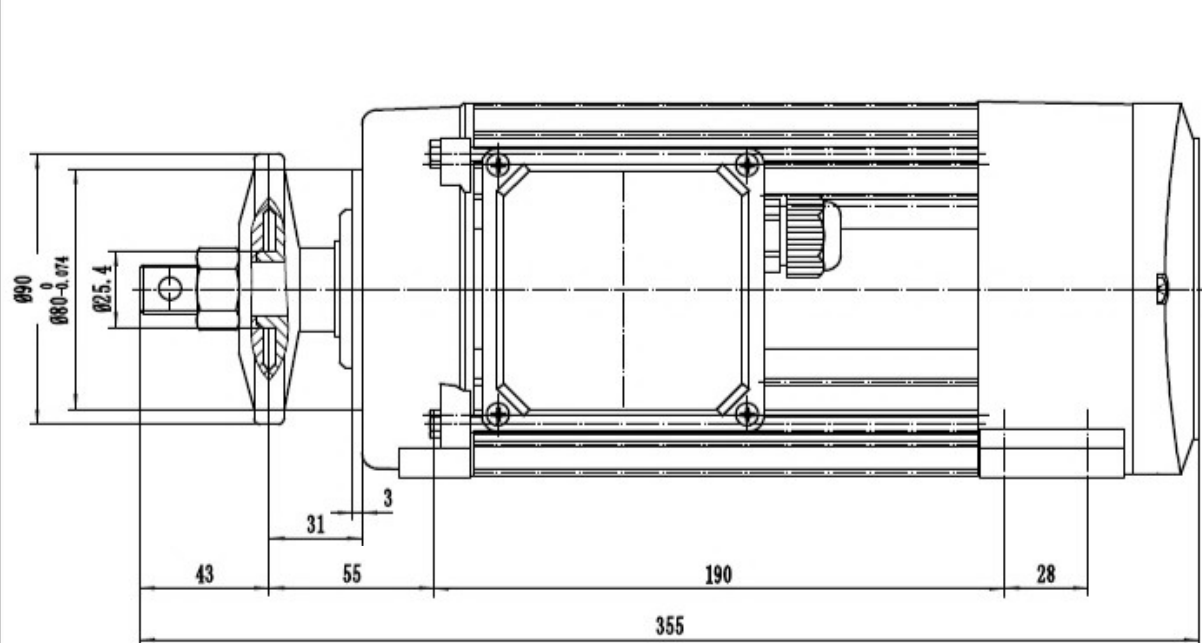

MSC 63 1-4